



**SECUREX RETROFIT
8FT HIGH**

Fence System: 2 or 3 rail – ALL CHAINLINK FRAMEWORK IN PLACE

Mesh size: 48" w x 96" h
Mesh size: 60" w x 96" h
Mesh panels per section: 2
On Center: 93" – 120"

Securex Fittings (per section):

End Section-End Post


7 Retro-Fit Bands (to match end post size)

Corner Section-Corner Post

14 Retro-Fit Bands (to match corner post size)

Line Section-Line Post

6 Retro-Fit C-Clamps (to match line post size)

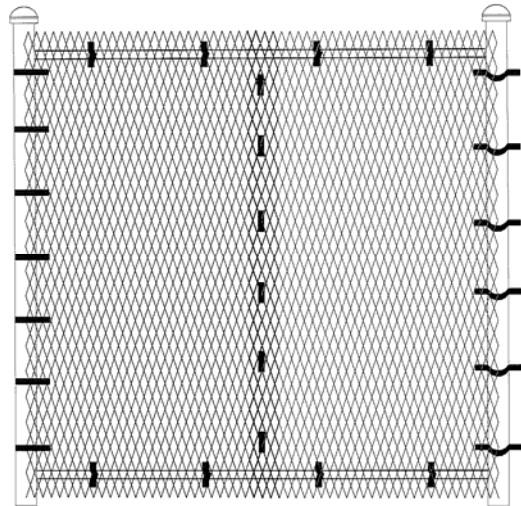

All Sections

48" wide mesh panel - 2 Retro-Fit C-Clamps per mesh section, per rail

60" wide mesh panel - 3 Retro-Fit C-Clamps per mesh section, per rail

6 Retro-Fit Bar Clamps (pair)

Securex Framework Requirement:

(strength requirements variable based on mesh choice)

2 ½" or larger Terminal Posts (end and corner) with caps

2 ½" or smaller Line Posts with caps

1-5/8" top/mid/bottom rail

Notes:

Framework assumes SCH40 or SS40/WT40 round pipe. *Framework size requirements are contingent on mesh choice.*

All mesh is available standard in the following sizes: ½-#13R ½"-13R(.188) ¾-#9R 1"-#7R(.240)

Expanded metal mesh is hot dip galvanized OR powder coat -Black or Green (custom colors available)

Fasteners – Securex recommends stainless steel nuts with breakaway bolts. Standard carriage bolts should be peened to prevent removal.

All Securex systems assume reverse diamond orientation unless otherwise requested.

Mesh panel size and configuration can be adjusted to design requirements.